



Cost-Efficient Fiber Testing with No Compromises

Ultra compact high-end **OTDR** with Bluetooth wireless and USB control



Up to 3 wavelengths for OTDR including Live port

Up to 42dB Dynamic Range and 1/4m Dead Zones

Optional LS/CW mode and VFL, no remote control needed to enable LS or VFL.

Software to control this device available for all popular platforms (Windows/iOS/Android/Linux)

Optimized for Fiberizer Cloud—powerful online tool for OTDR traces batch analysis and reporting

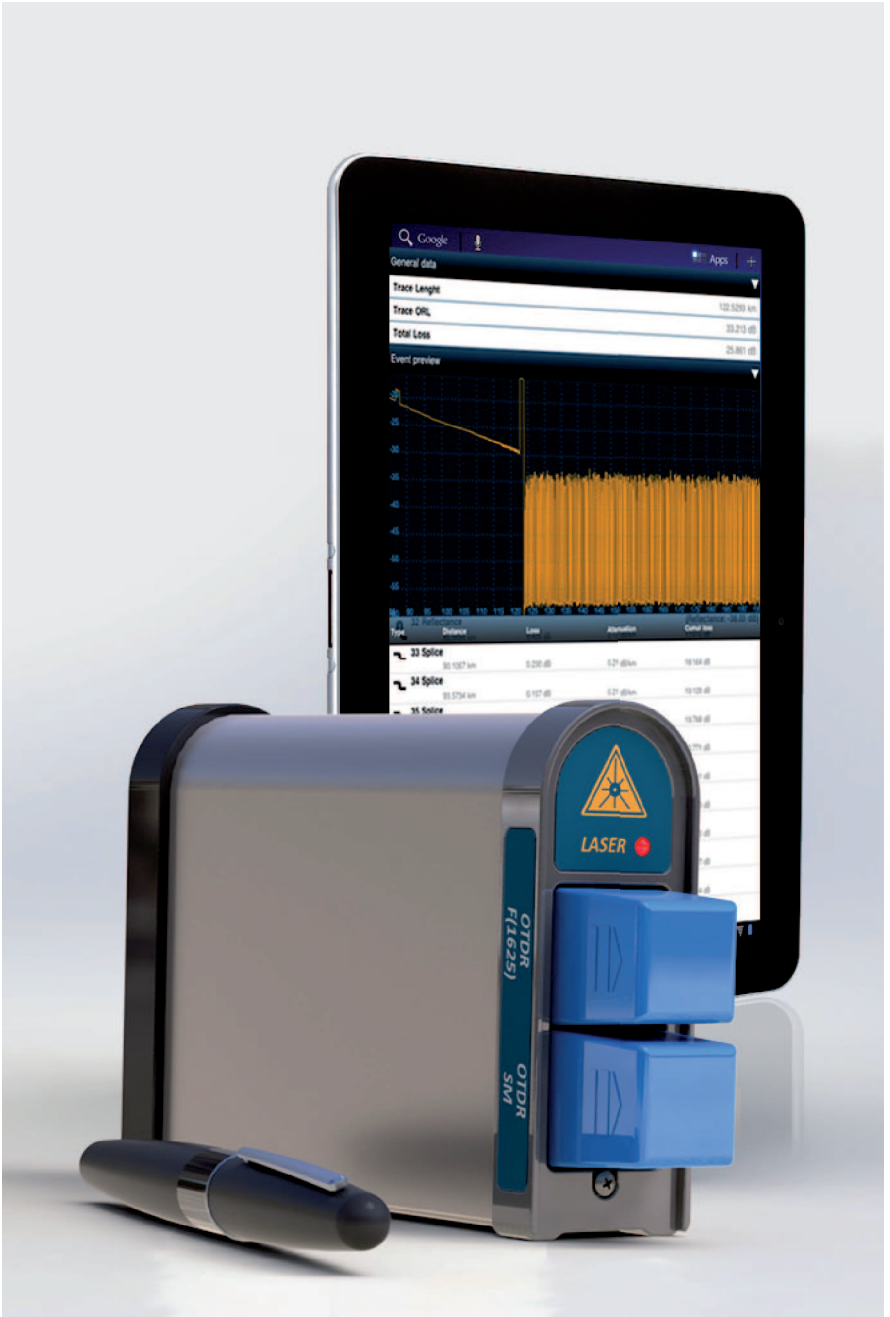

# UNIT DESCRIPTION

## Base Unit

Connection with PC	USB, Bluetooth
Power supply	Li-Ion Battery (8 hours)
Dimensions	125 x 31 x 85 mm
Weight	0.4 kg

## Smart "BOX"

- For simple operation like turning on VFL or LS just double-press the power button (no remote control need)
- Changeable optical adaptors (SC/FC/ST/LC)
- Aluminium case and gap-free design protect your device in hazardous environment

